
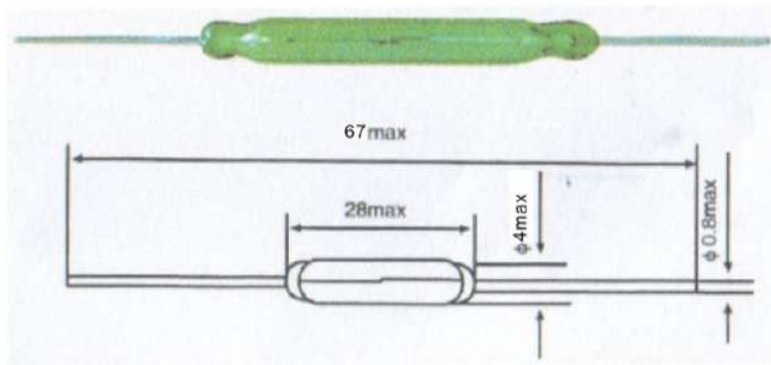

REED SWITCHES

LRSB-TSB-4X28-A1 (Silver)
LRSB-TGB-4X28-A1 (Gold)

1A, 250VDC, 24W, SPST-NO
4 x 28 mm Green Glass Reed Switch,
Silver terminal/ Gold terminal



Reed Switch Specification



Contact Form		SPST-NO
Max. Contact Rating	W	24
Max. Switching Voltage	VDC	250
Breakdown Voltage	VDC	250
Max. Switching Current	A	1
Max. Carry Current	A	2
Max. Initial Contact Resistance	MΩ	150
Min. Insulation Resistance	Ω	10^{12}
Operating time	ms	0.5
Bounce time	ms	0.5
Release time	ms	0.12
Resonant Frequency	Hz	2500
Max. Operating Frequency	Hz	450
Pull in Value	AT	50-80
Min. Drop out Value	FT	25
Max. Contact Capacitance	PF	0.3
Electrical Life Resistive Loads	Fq	1×10^6 (24V, 0.2mA)
Test Coll Number of turns Resistance	Ω	5000 400